

LED 고천장용 공장등

GHL 80W | 100W | 120W | 150W




- 국내 생산 최신 LG이노텍 LED PKG 및 국내 KS인증 전원공급장치 적용
- 친환경 조명 무수은, 친환경적인 LED조명 기구
- 에너지 절약 높은 고효율 제품으로 에너지절감 효과 극대화
- 우수한 품질 플리커 FREE로 깜빡임이 없으며 통신장비로 인한 오작동 없음
- 색온도: 5,700K / 수명시간: 50,000hrs / IP등급 : 65




※ 반사갓 (옵션, 별도구매)

<Pendent Type>

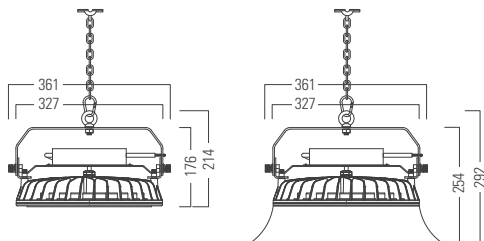



<Bracket Type>

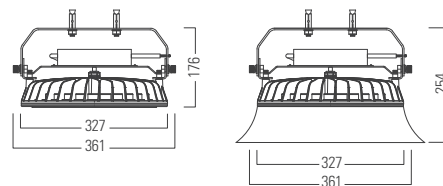

HIGH BAY LIGHTING



	GHL80W57K	GHL80W57K-R
소비전력(W)	80	80
총 광속(lm)	9,600	9,200
조도 @1m(lx)	4,100	4,500
전압 (AC)	100~240	100~240
광효율 (lm/W)	120	115
역률 (PF)	>0.9	>0.9
THD (%)	<20	<20
연색성 (Ra)	>80	>80
조사각 (°)	114	105
무게(kg)	4.5	4.5
구동 온도 (°C)	-20 ~ 45	-20 ~ 45

* 메탈램프 175~250W 대체

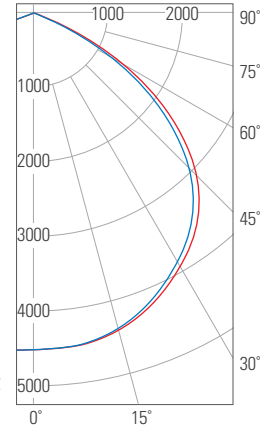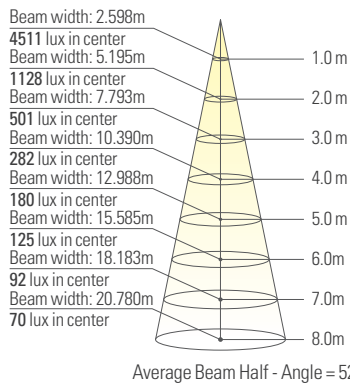



	GHL100W57K	GHL100W57K-R
소비전력(W)	100	100
총 광속(lm)	14,000	13,000
조도 @1m(lx)	5,200	5,600
전압 (AC)	100~240	100~240
광효율 (lm/W)	140	135
역률 (PF)	>0.9	>0.9
THD (%)	<20	<20
연색성 (Ra)	>80	>80
조사각 (°)	114	105
무게(kg)	4.5	4.5
구동 온도 (°C)	-20 ~ 45	-20 ~ 45

* 메탈램프 250W 대체

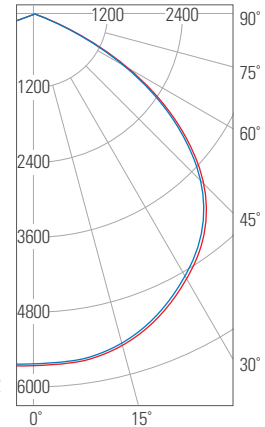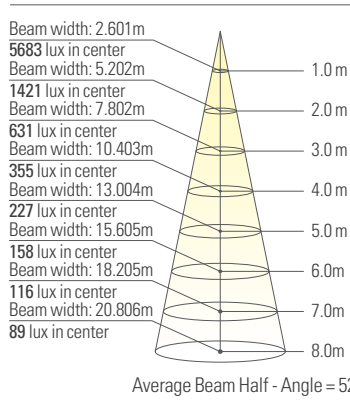

	GHL120W57K	GHL120W57K-R
소비전력(W)	120	120
총 광속(lm)	15,600	16,000
조도 @1m(lx)	6,300	6,800
전압 (AC)	100~240	100~240
광효율 (lm/W)	130	135
역률 (PF)	>0.9	>0.9
THD (%)	<20	<20
연색성 (Ra)	>80	>80
조사각 (°)	114	105
무게(kg)	4.5	4.5
구동 온도 (°C)	-20 ~ 45	-20 ~ 45

* 메탈램프 350W 대체

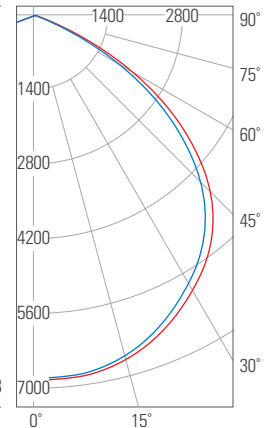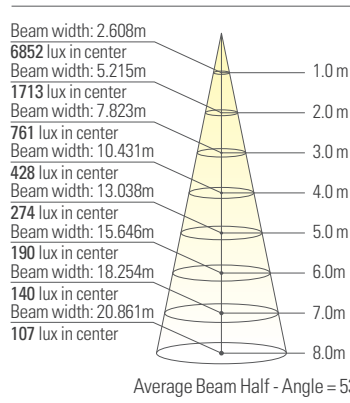

	GHL150W57K	GHL150W57K-R
소비전력(W)	150	150
총 광속(lm)	20,000	19,000
조도 @1m(lx)	7,500	8,200
전압 (AC)	100~240	100~240
광효율 (lm/W)	135	130
역률 (PF)	>0.9	>0.9
THD (%)	<20	<20
연색성 (Ra)	>80	>80
조사각 (°)	114	105
무게(kg)	4.5	4.5
구동 온도 (°C)	-20 ~ 45	-20 ~ 45

* 메탈램프 400W 대체

