


# LED 형광램프





**GT1200 13W | 15W | 17W | 18W | 22W | 22W(보급형)**

- **호환 가능 소켓** 기존 T10, T8 BASE / G13소켓 규격의 형광등기구와 호환 가능
- **안전성 우수** 절연방식의 SMPS를 적용
- **제품의 슬림화** 경량화된 제품으로 시공성 우수



|           | 13W     | 15W     | 17.4W   | 18W     | 22W     | 22W(보급형) |
|-----------|---------|---------|---------|---------|---------|----------|
| 무게(g)     | 300     | 300     | 300     | 300     | 300     | 300      |
| 소비전력(W)   | 13      | 15      | 17.4    | 18      | 22      | 22       |
| 전압(VAC)   | 220     | 220     | 220     | 220     | 220     | 220      |
| 색온도(K)    | 5,700   | 5,700   | 5,700   | 5,700   | 5,700   | 5,700    |
| 총광속(lm)   | 2,392   | 2,383   | 2,401   | 2,430   | 2,736   | 2,800    |
| 광효율(lm/W) | 184     | 158.9   | 138     | 135     | 124.4   | 127      |
| 역률        | >0.9    | >0.9    | >0.9    | >0.9    | >0.9    | >0.9     |
| 연색성(Ra)   | 80      | 80      | 80      | 80      | 80      | 80       |
| 인증        | KC, 고효율 | KC, 고효율 | KC, 고효율 | KC, 고효율 | KC, 고효율 | KC       |

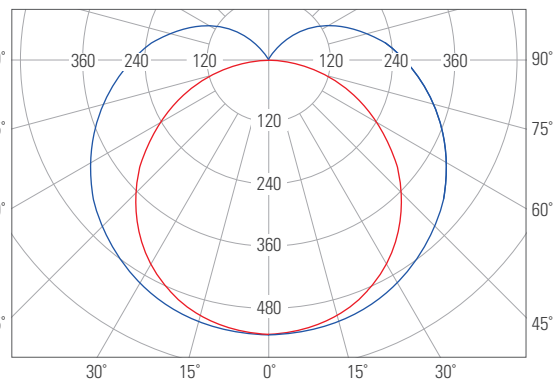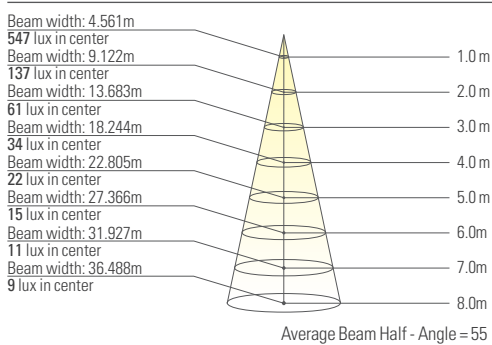

동반상생 협력제품